


## Cannon 4MP PTZ (2.8mm-12mm)

### Product Images

---



## 270° Rotation

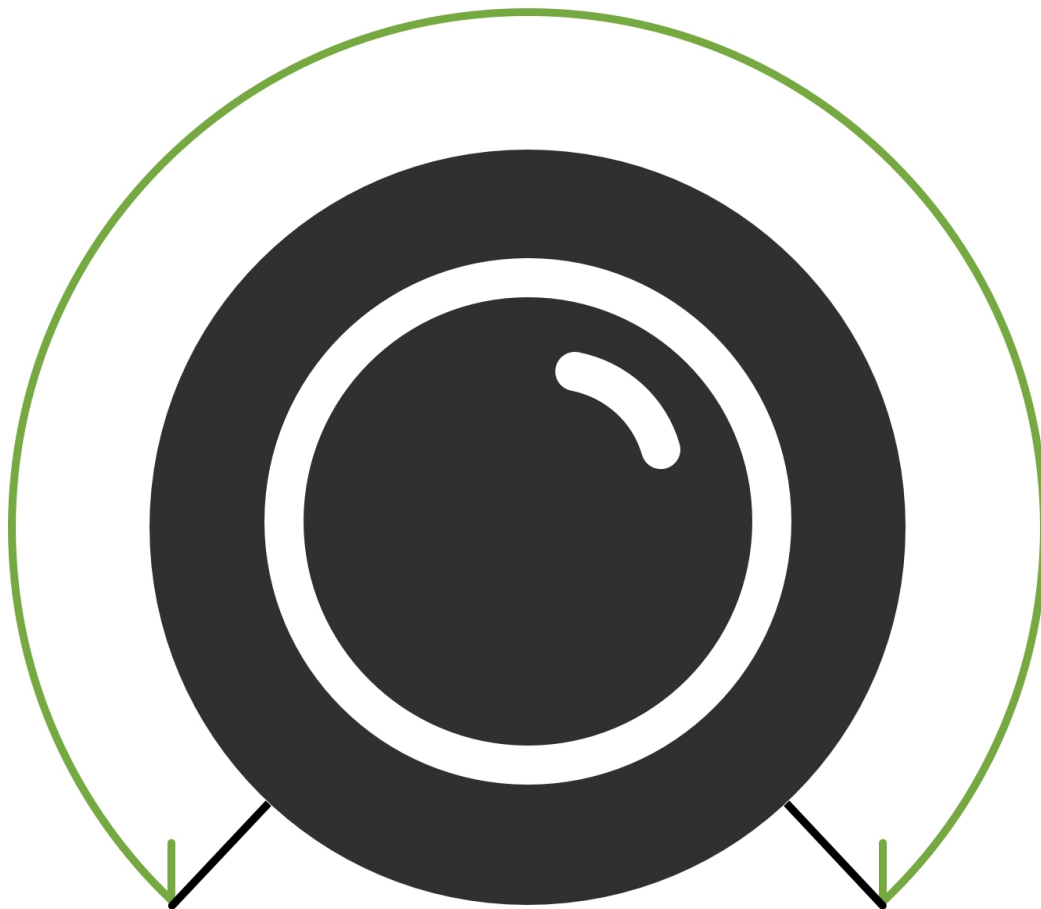

### Short Description

---

- SKU: PTZ4X2MPIR
- 4MP HD Resolution
- 4x Optical Zoom
- 60ft Night Vision
- 270° Rotation
- Audio Input/Output
- Small Form Factor  
(5 in base / 2.5 in dome)
- IK10 & IP66
- Easy to Install
- Smart Phone Access
- Free Support

- 3 Year Warranty

## Additional Information

Compatible Wall Mount Bracket	N/A
Camera Smart Features	Motion Detection, Line Crossing, Intrusion Detection
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.005 Lux @(F1.6, AGC ON) B/W: 0.001 Lux @(F1.6, AGC ON) 0 Lux with IR
Shutter Time	1/1~ 1/30,000s
Lens Type	Motorized
Focal Length Min.	2.8MM
Focal Length Max	12MM
Zoom	4X
Field Of View Min.	30°
Field Of View Max	98°
Facial Recognition Min.	25 Feet
Face Recognition Max	100FT
Day & Night	IRC
Digital Noise Reduction	3D DNR
Wide Dynamic Range	True WDR 120dB
Video Compression	H.265+ / H.265 / H.264 / MJPEG / H.264+
H.264 Codec Profile	Main Profile
Bitrate Min.	32 Kbps
Bitrate Max	8192 Kbps
Max Resolution	2688X1520, 20FPS
Supported Resolutions	2688×1520, 1920 × 1080, 1280 x 720
White Balance	Auto/Manual/ATW/Indoor/Outdoor/Daylight lamp/Sodium Lamp
Adjustable image Settings	Saturation, Brightness, Contrast, Sharpness.
Backlight Compensation	Yes, Zone Configurable.

Network Storage	NAS
Alarm Triggers	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Alarm Input	N/A
Alarm Output	N/A
Audio In	Yes
Audio Out	Yes
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Interoperability	ONVIF, PSIA, CGI
Security	Flicker less, heartbeat, mirror, user authentication, video mask, watermark
Communication Interface	1 RJ45 10 M / 100 M Ethernet interface
Operating Conditions	-20 °C – 60 °C (-4 °F – 140 °F)
Power Supply	12 VDC ± 10% , PoE (802.3af)
Power Consumption	Max 12W
Weather Proof Rating	IP66 Standard, IK10, TVS 4000V Lightning Protection, Surge Protection and Voltage Transient Protection
Dimensions	5.15" × 4.00"
Weight	1.17 lbs
IR distance	60ft
Onboard Storage	Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB
Product Warranty	3 Yr