


Uniview 5MP Active Deterrence IR PTZ IP Camera with 4x Zoom

Product Images



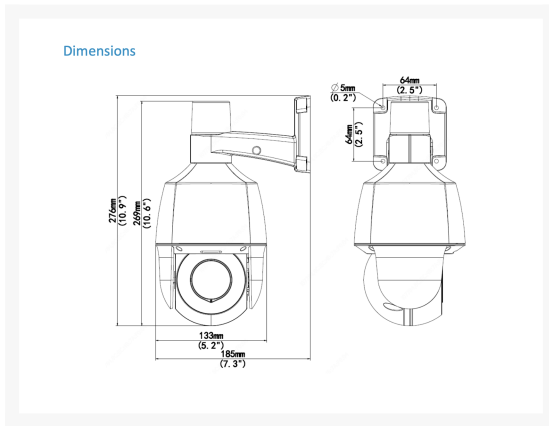

Short Description

- UNV Network Starlight Active Deterrence IR Outdoor PTZ camera
- Ultra 265/H.264/MJPEG
- Auto Tracking by Human Body Detection
- 4x optical zoom (2.8-12mm)
- 1/2.7" 5MP PS CMOS, 30fps@5MP (2880x1620)
- IR distance up to 164 feet
- 0.003 lux
- Micro SD up to 256GB
- Pan Range: 345 degree
- built-in Mic & Speaker
- built-in Red/Blue Flashing Light & Vocal Warning optional for alarm triggers
- DC 12V, POE+ (up to 24W)
- IP66
- Compatible with: TR-JB07-D-IN

Additional Information

Resolution	5 MP
Sensor Size	1/1.7", progressive scan, CMOS
Lens	2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
Detect	63m (206ft)~270m (885ft)
Observe	25.2m (82.6ft)~108m (354.3ft)
Recognize	12.6m (41.3ft)~54m (177ft)
Identify	6.3m (20.6ft)~27.0m (88.5ft)
Angle of View (H)	103°~ 31°
Angle of View (V)	55°~ 18°
Angle of View (O)	107°~36°
Shutter	Auto/Manual, shutter time: 1 ~ 1/100000s
Minimum Illumination	Colour: 0.003 Lux @ F1.6 (AGC ON)
Day/Night	IR-cut filter with auto switch (ICR)
Digital Noise Reduction	2D/3D DNR
S/N	>52dB
IR Range (or LED)	Up to 50m (164 ft) IR range
IR Wavelength	850nm
IR On/Off Control	Auto/Manual
Defog	Digital Defog
Wide Dynamic Range	120dB
Video Compression	H.264, H.265, MJPEG, Ultra 265
H.264 code profile	Baseline profile, High profile, Main Profile
Frame Rate	"Main Stream: 5MP (2880*1620), Max 30fps; 4MP (2560*1440), Max 30fps;3MP (2304*1296), Max 30fps; 2MP (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Ma

Bit Rate (min~max)	128 Kbps~16 Mbps
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
Region of Interest	Supported
Motion Detection	supported
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
Smart IR (or Smart Illumination)	Supported
Image Flip	180°, 90° Clockwise, 90° Counter Clockwise, Horizontal, Normal, Vertical
Dewarping	No
HLC	Yes
BLC	Yes
Audio Compression	G.711A, G.711U
Audio Suppression	Yes
Audio Sampling Rate	8KHZ
Edge Storage (SD)	Micro SD, Up to 256GB
Network Storage	ANR, NAS(NFS)
Supported Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP , PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP , 802.1x , SNMP, SSL
Compatible Integration	API, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Compatible Clients	EZLive, EZStation, EZView
Web Browser Support	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
Pan Range	0° ~ 345°
Pan Speed	0.1°/s ~ 50°/s, Preset speed: 50°/s
Tilt Range	-10° ~ 110°
Tilt Speed	0.1°/s ~ 40°/s, Preset speed: 40°/s
Number of Presets	256

Preset Patrol	16 patrols, up to 64 presets for each patrol
Patrol Stay Time	120s~1800s
Home Position	Yes
Network Interface	1 RJ45 10/100M Base-TX Ethernet
Built-in Mic	Yes
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
Maximum Power Consumption	18 W
Dimensions (Ø x H)	Φ133mm*269mm (Φ5.2"x 10.6")
Net Weight	0.87 kg (1.92lb)
Material	Metal, Plastic
Operating Conditions	-20°C ~ 60°C (-4°F to 140°F), Humidity:≤95% RH(non-condensing)
Storage Environment	-20°C ~ 60°C (-4°F to 140°F), Humidity:≤95% RH(non-condensing)
Surge Protection	2KV
Ingress Protection	IP66